


AD5430-02A (general purpose 8ch D/A board)

Connector form: D-Sub37 pin
 Connector (unit side): DCLC-J37SAF (made by JAE)
 Compatible connector (cable side): DC-37PF-N or equivalent

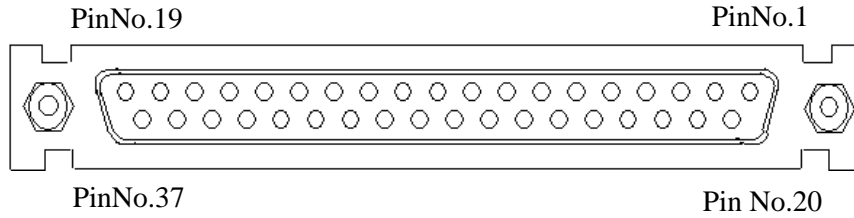

Pin No.	Signal name	Pin No.	Signal name
1	Analog output Ch1	20	Analog GND
2	NC	21	NC
3	Analog output Ch2	22	Analog GND
4	NC	23	NC
5	Analog output Ch3	24	Analog GND
6	NC	25	NC
7	Analog output Ch4	26	Analog GND
8	NC	27	NC
9	Analog output Ch5	28	Analog GND
10	NC	29	NC
11	Analog output Ch7	30	Analog GND
12	NC	31	NC
13	Analog output Ch7	32	Analog GND
14	NC	33	NC
15	Analog output Ch8	34	Analog GND
16	NC	35	NC
17	External trigger (+)	36	External trigger (-)
18	External clock (+)	37	External clock (-)
19	NC		

Each Analog GND is separate for each channel.