

# Digital Height and Weight Scale

Model: AD-6351

The AD-6351 is a digital height and weight scale with a compact design and large casters for portability.

## General Specifications

- Can display measurements in kg
- Lightweight and compact design for easy storage
- BMI measurement function
- Battery operation for over 40 hours
- Thin 75 mm design for easy use
- Adjustable indicator position



Easy to carry



Lightweight & compact size



Flexible display orientation



User-friendly display




Height & Weight display mode



BMI & Weight display mode

## DAS (Data Acquisition System)

Automated data collection

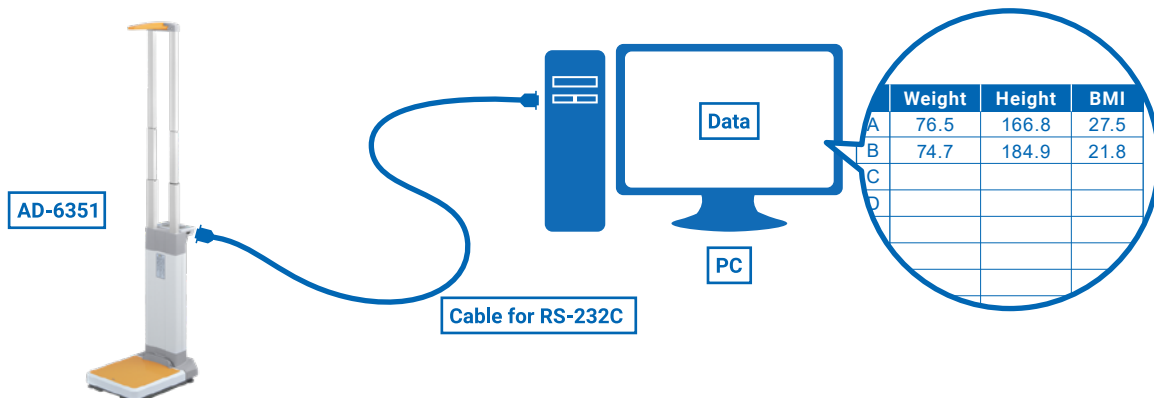

## Technical Specifications

Weight Measurement	Capacity	150 kg
	Graduation	0.1 kg
Height Measurement	Measurement Method	Manual
	Measurement Range	88 cm to 210 cm
	Measurement Unit	1 mm
	Measurement Accuracy	±2 mm
Power Source	6 Batteries LR6 (AA) / AC Adapter (100 V to 240 V)	
Battery Life	Approx. 40 hours (Using batteries)	
Interface	RS 232C 1ch (D-sub 9P)	
Dimensions (W) x (D) x (H)	330 x 483 x 964 mm (When stored) Platform: 330 x 330 x 73 mm	
Weight	13 kg (Unit without batteries)	
Functions and Properties	BMI measurement, TARE (Default function), Auto power-off, Clock (External output), External ID input	

## Optional Accessories

Product Code	Option Name
AX-PP147-S	Printer paper(5 pieces/box)
AD-PR580	AD printer unit
AX-KO1371-200	Cable for RS-232C (2 m)
AX-KO3937	Cable for RS-232C (75 cm)
AD-A104	Switch (AD-SW600)
AX-KO3946*	AC Adapter for AD-PR580
AX-KO3938*	AC code for AX-BLS-120W

\*This is an accessory for the AD-PR580.



Printer paper



AD printer unit



Switch (AD-SW600)



Cable for RS-232C  
(2 m)



(75 cm)

## AD Printer Unit (AD-PR580)

- To use this product, you will need a 75 cm (AX-KO3937) or 2 m (AX-KO1371-200) RS-232C cable.
- An AC adapter for the printer is included.



### Technical Data

Designated paper	AX-PP147-S W 58 mm x L 29 m
Power supply	AC adapter(AX-KO3946)

## What is In The Box

- 1 Sticker for AC adapter identification
- 1 Instruction manual
- 1 Warranty

- Please purchase an AC adapter that complies with the standards of your region.
- Ensure that the product complies with the regulatory requirements of the country where it will be used before use.
- Specifications may differ in each country. Please contact an A&D subsidiary for more information.



A&D Company Limited.(JAPAN)  
URL:aandd.jp

A&D ENGINEERING, INC.(USA)  
URL:andonline.com

A&D Instruments Canada Inc.(CANADA)  
URL:autocontrol.com

A&D INSTRUMENTS LIMITED(United Kingdom)  
URL:andprecision.com

A&D AUSTRALASIA PTY LTD(Australia)  
URL:andaustralasia.com.au

A&D RUS CO., LTD.(Russia)  
URL:and-rus.ru

A&D Technology Trading(Shanghai)Co., Ltd(China)  
URL:aanddtech.cn

A&D INSTRUMENTS INDIA PRIVATE LIMITED(India)  
URL:aanddindia.in